


Model: G-095-D

Direct Drive Centrifugal Roof Exhaust Fan

Dimensional	
Quantity	5
Weight w/o Acc's (lb)	28
Weight w/ Acc's (lb)	33
Standard Curb Cap Size (in.)	17 x 17
Roof Opening (in.)	13.5 x 13.5

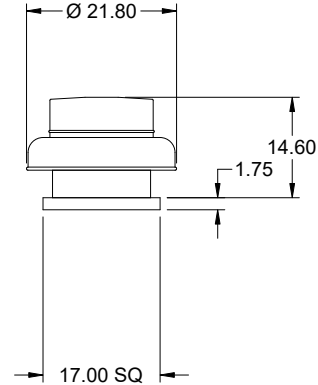


OVERALL HEIGHT MAY BE GREATER DEPENDING ON MOTOR, ADAPTER, AND/OR HINGE BASE.

Performance	
Requested Volume (CFM)	957
Actual Volume (CFM)	940
Total External SP (in. wg)	0.136
Fan RPM	1550
Operating Power (hp)	0.09
Elevation (ft)	5,138
Airstream Temp.(F)	70
Air Density (lb/ft3)	0.062
Tip Speed (ft/min)	4,413
Static Eff. (%)	23

Misc Fan Data	
Fan Energy Index (FEI)	-
Outlet Velocity (ft/min)	810

Motor	
Motor Mounted	Yes
Size (hp)	1/8 (or greater)
Voltage/Cycle/Phase	115/60/1
Enclosure	ODP
Motor RPM	1550
Efficiency Rating	Standard
Windings	1

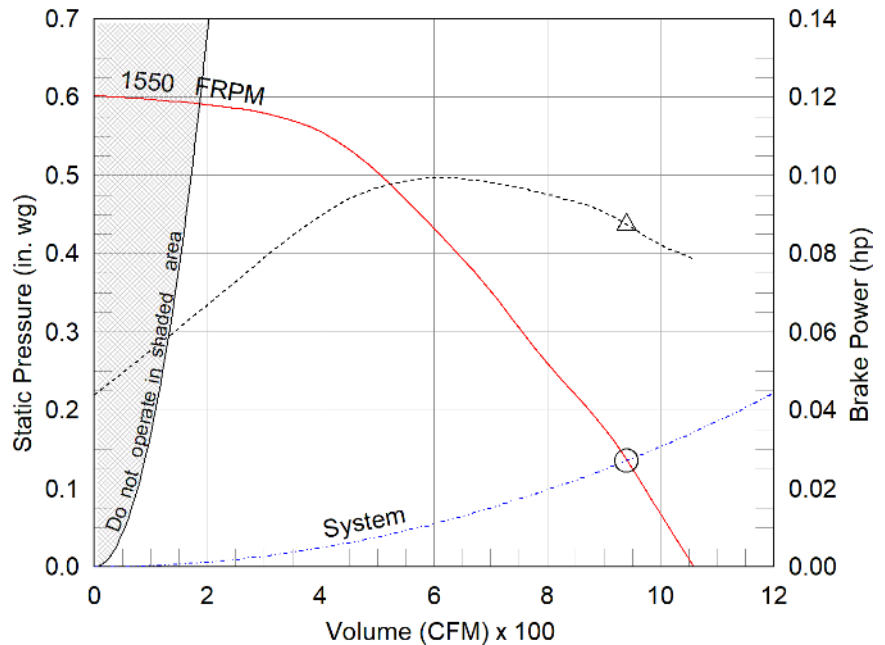

- △ Operating Bhp point
- Operating point at Total External SP
- Fan curve
- - - System curve
- ... Brake horsepower curve

Static Pressure Calculations

External SP	0.141 in. wg
Direct Drive RPM Adjustment	-0.005 in. wg
Total External SP	0.136 in. wg

Sound Power by Octave Band

Sound Data	62.5	125	250	500	1000	2000	4000	8000	LwA	dBA	Sones
Inlet	75	75	74	66	57	60	55	45	69	58	9.2

Notes:

All dimensions shown are in units of in.
*Please consult factory for actual motor amp draw
LwA - A weighted sound power level, based on ANSI S1.4
dBA - A weighted sound pressure level, based on 11.5 dB
attenuation per Octave band at 5 ft - dBA levels are not licensed
by AMCA International
Sones - calculated using ANSI/AMCA 301 at 5 ft



Model: G-095-D

Direct Drive Centrifugal Roof Exhaust Fan

Standard Construction Features:

- Aluminum housing - Backward inclined composite (sizes 60-95) or aluminum (sizes 97-300) wheel - Aluminum curb cap with prepunched mounting holes - Birdscreen - Ball bearing motors (sizes 85-300 and all Vari Green), sleeve bearing motors (sizes 60-80) - Motor isolated on shock mounts - Corrosion resistant fasteners

Selected Options & Accessories:

Curb Cap Size - 17 Square
UL/cUL 705 Listed - "Power Ventilators"
Switch, NEMA-1, Toggle,
Junction Box Mounted & Wired in weather-protected motor compartment
Birdscreen: Galvanized, nom. 84% Free Area
Composite Wheel Material
Conduit Chase Qty 1
Unit Warranty: 1 Yr (Standard)

Disconnect Switch

Enclosure Rating: NEMA-1


Standard Construction Features:

Enclosure constructed for indoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment and to provide a degree of protection against falling dust. This enclosure meets the rod entry and the indoor corrosion protection design tests. The rod entry test is intended to simulate incidental contact with enclosure equipment. Enclosure is equipped with provision to lockout in the off position with customer supplied lock.

Disconnect Switch Configuration

Type:	Toggle	Motor Size:	1/8 hp	Voltage:	115	UL Listed:	Yes
Manufacturer:	Pass and Seymour	Cycle:	60	Amperage:	15	CSA Approved:	Yes
Overload Protection:	None	Phase:	1	Switch Pole(s):	1	Rating:	1/2 hp
Junction Box Mtg.:	Mounted and Wired	RPM:	1550	Exp. Resist. Wiring:	None		
Switch Mounting:	Shipped With Unit						


Electrical Drawing Details

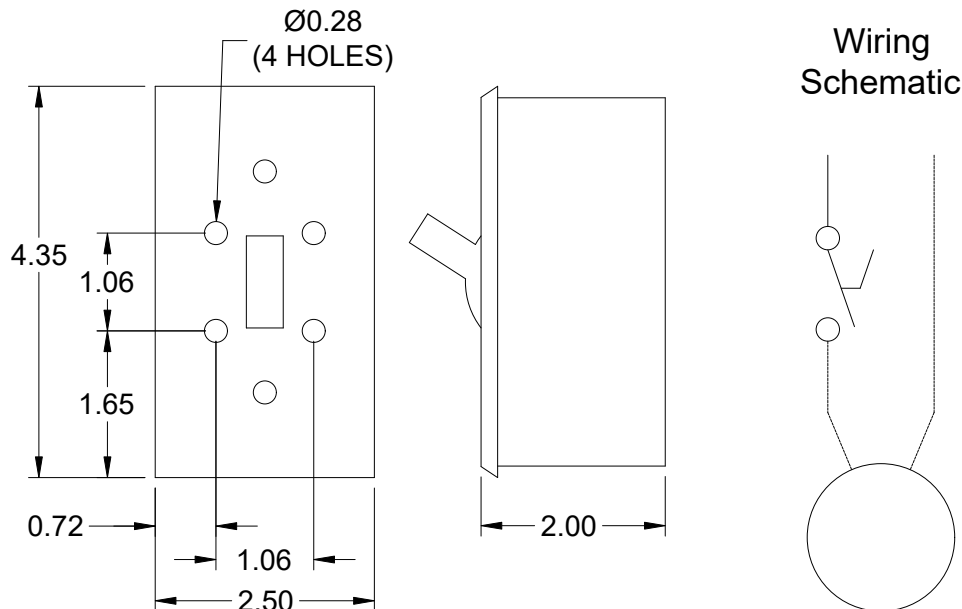

Notes: All dimensions shown are in units of in.

Assembly Drawing

Type: Direct Drive Centrifugal Roof Exhaust Fan

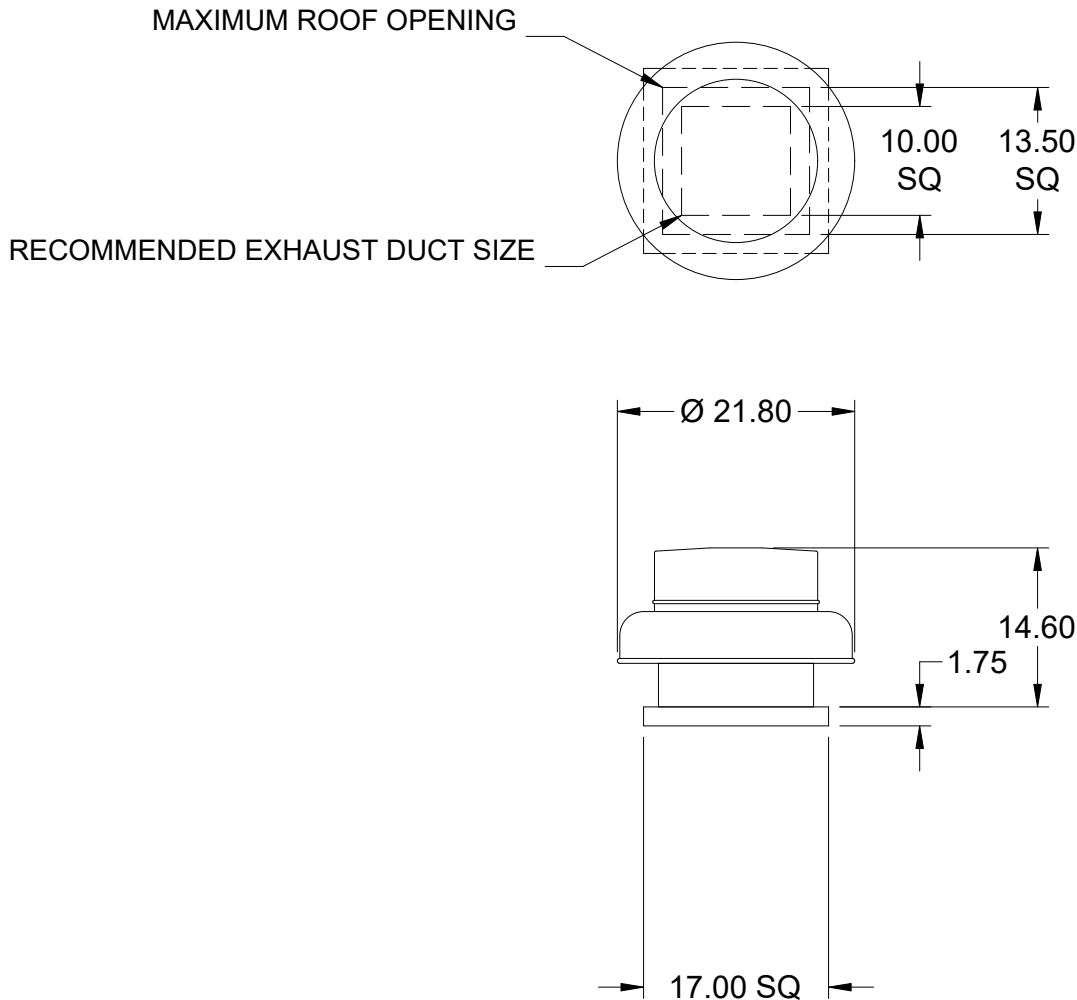

DUCT DIMENSIONS ARE LARGEST POSSIBLE DUCT TO FIT THROUGH CURB.
CONSULT SYSTEM DESIGN ENGINEER FOR RECOMMENDED DUCT SIZE.

OVERALL HEIGHT MAY BE GREATER DEPENDING ON MOTOR, ADAPTER, AND/OR
HINGE BASE.

Notes: All dimensions shown are in units of in..